



INTERNATIONAL ATOMIC ENERGY AGENCY

NUCLEAR DATA SERVICES

DOCUMENTATION SERIES OF THE IAEA NUCLEAR DATA SECTION

IAEA-NDS-227

April 2018

POINT 2018: ENDF/B-VIII Final Temperature Dependent Cross Section Library

by

Dermott E. Cullen

National Nuclear Data Center, BNL, alumnus

Nuclear Data Section, IAEA, Vienna, alumnus

University of California, LLNL, retired

1466 Hudson Way

Livermore, CA 94550

E.Mail: RedCullen1@comcast.net

Website: <http://home.comcast.net/~redcullen1>

Abstract: This report is one in the series of “POINT” reports that over the years have presented temperature dependent cross sections for the then current version of ENDF/B. In each case I have used my personal computer at home and publicly available data and codes: 1) publicly available nuclear data (the current ENDF/B data, available on-line at the National Nuclear Data Center, Brookhaven National Laboratory, <http://www.nndc.bnl.gov/>) and, 2) publicly available computer codes (the current PREPRO codes, available on-line at the Nuclear Data Section, IAEA, Vienna, Austria, <http://www-nds.iaea.or.at/ndspub/endl/prepro/>) and, 3) My own personal computer located in my home. I have used these in combination to produce the temperature dependent cross sections used in applications and described in this report. I should mention that today anyone with a personal computer can produce these results: by its very nature I consider this data to be born in the public domain.

Nuclear Data Section
International Atomic Energy Agency
P.O. Box 100
A-1400 Vienna
Austria

E-mail: NDS.Contact-Point@iaea.org

Fax: (43-1)26007

Telephone: (43-1)2600-21725

Web: <http://www-nds.iaea.org>

Disclaimer

Neither the author nor anybody else makes any warranty, expressed or implied, or assumes any legal liability or responsibility for the accuracy, completeness or usefulness of any information disclosed, or represents that its use would not infringe privately owned rights.

The IAEA-NDS would appreciate any comment on this report at: NDS.Contact-Point@iaea.org.

The IAEA-NDS-reports should not be considered as formal publications. When a nuclear data library is sent out by the IAEA Nuclear Data Section, it will be accompanied by an IAEA-NDS-report which should give the data user all necessary documentation on contents, format and origin of the data library.

IAEA-NDS-reports are updated whenever there is additional information of relevance to the users of the data library.

For citations care should be taken that credit is given to the author of the data library and/or to the data center which issued the data library. The editor of the IAEA-NDS-report is usually not the author of the data library.

Vienna, April 2018

POINT 2018: ENDF/B-VIII Final Temperature Dependent Cross Section Library

by

Dermott E. Cullen

National Nuclear Data Center, BNL, alumnus

Nuclear Data Section, IAEA, Vienna, alumnus

University of California, LLNL, retired

1466 Hudson Way

Livermore, CA 94550

E.Mail: RedCullen1@comcast.net

Website: <http://home.comcast.net/~redcullen1>

April 17, 2018

Contents

Acknowledgments.....	1
Overview.....	1
Introduction: POINT 2018: ENDF/B-VIII Final	2
Periodic Table	2
What's New and Old; ENDF/B-VIII vs. VII.....	2
POINT 2018 versus POINT 2015.....	3
PREPRO 2018 Codes	3
Data Processing.....	4
Accuracy or Uncertainty of Results.....	5
Contents of the Library	5
Requesting POINT2018 Data	6
Installation and Use of POINT2018	7
FORTRAN, C C++ Compatible ENDF results	7
PREPRO uses 9 or 10 digit precision for all ENDF output.....	8
Improved BEST Input Parameters	11
Doppler Broadening High Energy Cutoff.....	12
The Effects of Temperature and Doppler Broadening.....	13
References.....	19

Acknowledgments

I thank **Said Mughabghab** for his detailed explanation of the use of his published resonance parameters which were used in ENDF/B-VIII evaluations. I thank **Dave Brown** and **Ramon Arcilla, Jr.**, of the National Nuclear Data Center (NNDC), Brookhaven National Laboratory, for supplying the original ENDF/B-VIII, used in this project. I thank **Janice Arwood** and **Mark Baird** (RSICC, Oak Ridge) for carefully handling, checking and recommending improvements for each version of POINT. I thank **Nancy Larsen, Bob MacFarlane, Maurice Greene**, and, **Mike Dunn**, for their comparison of their cross section processing codes (SAMMY, NJOY and AMPX) against the PREPRO codes. These comparisons have led to significant improvements in the accuracy and reliability of the results produced by all four codes (SAMMY, NJOY, AMPX, PREPRO). I thank **Jean-Christophe Sublet** (NDS, IAEA, Vienna), who contributed so many GREAT ideas for me to incorporate into my PRERO codes. I thank **Andrej Trkov** and **Kira Nathani** (NDS, IAEA, Vienna) for editing my reports into a form suitable for publication by the Nuclear Data Section, IAEA.

Overview

This report is one in the series of “POINT” [1, 2, 3,4, 5, 6] reports that over the years have presented temperature dependent cross sections for the then current version of ENDF/B [7, 8]. In each case I have used my personal computer at home and publicly available data and codes:

- 1) publicly available nuclear data (the current ENDF/B data, available on-line at the National Nuclear Data Center, Brookhaven National Laboratory, <http://www.nndc.bnl.gov/>) and,
- 2) publicly available computer codes (the current PREPRO codes, available on-line at the Nuclear Data Section, IAEA, Vienna, Austria, <http://www-nds.iaea.or.at/ndspub/endl/prepro/>) and,
- 3) My own personal computer located in my home.

I have used these in combination to produce the temperature dependent cross sections used in applications and described in this report. I should mention that today anyone with a personal computer can produce these results: by its very nature I consider this data to be born in the public domain.

Introduction: POINT 2018: ENDF/B-VIII Final

The latest **ENDF/B-VIII Final** [7] data library was recently released and is now freely available through the National Nuclear Data Center (NNDC), Brookhaven National Laboratory. **This release completely supersedes all preceding releases of ENDF/B.** Individual files and/or complete libraries can also be downloaded from: <http://www.nndc.bnl.gov/>

Periodic Table

ENDF/B-VII and VIII both span the periodic table of elements from $Z = 1$ to 100, but not all elements are represented. The below table summarizes the number of evaluations included for each element (Z) in ENDF/B-VII (7) and VIII (8). **0*** indicates no data for this element, e.g., ENDF/B-VIII does not include any data for $Z = 85, 86,$ and 87 .

Z	7	8	Z	7	8	Z	7	8	Z	7	8	Z	7	8
1	3	3	21	1	1	41	3	3	61	5	10	81	2	3
2	2	2	22	5	5	42	8	9	62	9	11	82	4	5
3	2	2	23	2	3	43	1	2	63	7	7	83	1	2
4	2	2	24	4	5	44	10	11	64	8	9	84	0*	3
5	2	2	25	1	2	45	2	3	65	2	4	85	0*	0*
6	1	2	26	4	5	46	7	9	66	7	11	86	0*	0*
7	2	2	27	3	3	47	4	12	67	2	2	87	0*	0*
8	2	3	28	6	7	48	9	11	68	6	9	88	4	4
9	1	1	29	2	3	49	2	3	69	3	4	89	3	3
10	0*	3	30	6	7	50	14	15	70	0*	9	90	8	8
11	2	2	31	2	3	51	5	6	71	2	2	91	5	5
12	3	3	32	5	7	52	11	15	72	6	9	92	12	12
13	1	2	33	2	3	53	5	10	73	3	3	93	6	7
14	3	5	34	7	9	54	12	14	74	5	7	94	10	11
15	1	1	35	2	3	55	5	5	75	2	3	95	7	7
16	4	5	36	7	9	56	9	11	76	0*	9	96	11	11
17	2	3	37	3	3	57	3	3	77	2	4	97	6	6
18	3	6	38	6	7	58	8	10	78	0*	9	98	8	9
19	3	3	39	3	3	59	3	3	79	1	1	99	6	6
20	6	9	40	7	7	60	8	9	80	7	10	100	1	1

What's New and Old; ENDF/B-VIII vs. VII

ENDF/B-VIII (POINT2018) includes **557** evaluations, compared to **423** evaluations in ENDF/B-VII (POINT2015). There are **135** new evaluations included in VIII which were not included in VII. **422** of the **423** evaluations from VII are included in VIII; the only one not included is **6-C-Nat**, which has been replaced by its isotopes. Note, that with **6-C-Nat** replaced by its isotopes, **VIII does not include any elemental mixtures.**

135 New Evaluations in POINT2018 (ENDF/B-VIII)

Neutron	18-Ar-41	33-As-73	47-Ag-112	52-Te-131	61-Pm-143	68-Er-163	72-Hf-181	77-Ir-192	81-Tl-204
6-C-12	20-Ca-41	34-Se-75	47-Ag-113	52-Te-131m	61-Pm-144	68-Er-165	72-Hf-182	77-Ir-194m	82-Pb-205
6-C-13	20-Ca-45	34-Se-81	47-Ag-114	53-I-128	61-Pm-145	68-Er-169	74-W-181	78-Pt-190	83-Bi-210m
8-O-18	20-Ca-47	35-Br-80	47-Ag-115	53-I-132	61-Pm-146	69-Tm-171	74-W-185	78-Pt-191	84-Po-208
10-Ne-20	23-V-49	36-Kr-79	47-Ag-116	53-I-132m	61-Pm-150	70-Yb-168	75-Re-186m	78-Pt-192	84-Po-209
10-Ne-21	24-Cr-51	36-Kr-81	47-Ag-117	53-I-133	62-Sm-145	70-Yb-169	76-Os-184	78-Pt-193	84-Po-210
10-Ne-22	25-Mn-54	38-Sr-85	47-Ag-118m	53-I-134	62-Sm-146	70-Yb-170	76-Os-185	78-Pt-194	93-Np-236m
13-Al-26m	26-Fe-55	42-Mo-93	48-Cd-107	54-Xe-125	64-Gd-159	70-Yb-171	76-Os-186	78-Pt-195	94-Pu-245
14-Si-31	28-Ni-63	43-Tc-98	48-Cd-109	54-Xe-127	65-Tb-158	70-Yb-172	76-Os-187	78-Pt-196	98-Cf-247
14-Si-32	29-Cu-64	44-Ru-97	49-In-114	56-Ba-131	65-Tb-161	70-Yb-173	76-Os-188	78-Pt-197	
16-S-35	30-Zn-69	45-Rh-104	50-Sn-121m	56-Ba-139	66-Dy-154	70-Yb-174	76-Os-189	78-Pt-198	
17-Cl-36	31-Ga-70	46-Pd-103	51-Sb-122	58-Ce-137	66-Dy-155	70-Yb-175	76-Os-190	80-Hg-197	
18-Ar-37	32-Ge-71	46-Pd-109	52-Te-121	58-Ce-137m	66-Dy-157	70-Yb-176	76-Os-191	80-Hg-197m	
18-Ar-39	32-Ge-75	47-Ag-108	52-Te-121m	60-Nd-149	66-Dy-159	72-Hf-175	76-Os-192	80-Hg-203	

423 Evaluations in POINT20115 (ENDF/B-VII) (422 in VIII; 6-C-Nat in RED not in VIII)

1-H -1	20-Ca-44	32-Ge-74	42-Mo-92	49-In-115	54-Xe-131	61-Pm-147	68-Er-166	88-Ra-224	94-Pu-242
1-H -2	20-Ca-46	32-Ge-76	42-Mo-94	50-Sn-112	54-Xe-132	61-Pm-148	68-Er-167	88-Ra-225	94-Pu-243
1-H -3	20-Ca-48	33-As-74	42-Mo-95	50-Sn-113	54-Xe-133	61-Pm-148m	68-Er-168	88-Ra-226	94-Pu-244
2-He-3	21-Sc-45	33-As-75	42-Mo-96	50-Sn-114	54-Xe-134	61-Pm-149	68-Er-170	89-Ac-225	94-Pu-246
2-He-4	22-Ti-46	34-Se-74	42-Mo-97	50-Sn-115	54-Xe-135	61-Pm-151	69-Tm-168	89-Ac-226	95-Am-240
3-Li-6	22-Ti-47	34-Se-76	42-Mo-98	50-Sn-116	54-Xe-136	62-Sm-144	69-Tm-169	89-Ac-227	95-Am-241
3-Li-7	22-Ti-48	34-Se-77	42-Mo-99	50-Sn-117	55-Cs-133	62-Sm-147	69-Tm-170	90-Th-227	95-Am-242
4-Be-7	22-Ti-49	34-Se-78	42-Mo-100	50-Sn-118	55-Cs-134	62-Sm-148	71-Lu-175	90-Th-228	95-Am-242m
4-Be-9	22-Ti-50	34-Se-79	43-Tc-99	50-Sn-119	55-Cs-135	62-Sm-149	71-Lu-176	90-Th-229	95-Am-243
5-B -10	23-V -50	34-Se-80	44-Ru-96	50-Sn-120	55-Cs-136	62-Sm-150	72-Hf-174	90-Th-230	95-Am-244
5-B -11	23-V -51	34-Se-82	44-Ru-98	50-Sn-122	55-Cs-137	62-Sm-151	72-Hf-176	90-Th-231	95-Am-244m
6-C -Nat	24-Cr-50	35-Br-79	44-Ru-99	50-Sn-123	56-Ba-130	62-Sm-152	72-Hf-177	90-Th-232	96-Cm-240
7-N -14	24-Cr-52	35-Br-81	44-Ru-100	50-Sn-124	56-Ba-132	62-Sm-153	72-Hf-178	90-Th-233	96-Cm-241
7-N -15	24-Cr-53	36-Kr-78	44-Ru-101	50-Sn-125	56-Ba-133	62-Sm-154	72-Hf-179	90-Th-234	96-Cm-242
8-O -16	24-Cr-54	36-Kr-80	44-Ru-102	50-Sn-126	56-Ba-134	63-Eu-151	72-Hf-180	91-Pa-229	96-Cm-243
8-O -17	25-Mn-55	36-Kr-82	44-Ru-103	51-Sb-121	56-Ba-135	63-Eu-152	73-Ta-180	91-Pa-230	96-Cm-244
9-F -19	26-Fe-54	36-Kr-83	44-Ru-104	51-Sb-123	56-Ba-136	63-Eu-153	73-Ta-181	91-Pa-231	96-Cm-245
11-Na-22	26-Fe-56	36-Kr-84	44-Ru-105	51-Sb-124	56-Ba-137	63-Eu-154	73-Ta-182	91-Pa-232	96-Cm-246
11-Na-23	26-Fe-57	36-Kr-85	44-Ru-106	51-Sb-125	56-Ba-138	63-Eu-155	74-W -180	91-Pa-233	96-Cm-247
12-Mg-24	26-Fe-58	36-Kr-86	45-Rh-103	51-Sb-126	56-Ba-140	63-Eu-156	74-W -182	92-U -230	96-Cm-248
12-Mg-25	27-Co-58	37-Rb-85	45-Rh-105	52-Te-120	57-La-138	63-Eu-157	74-W -183	92-U -231	96-Cm-249
12-Mg-26	27-Co-58m	37-Rb-86	46-Pd-102	52-Te-122	57-La-139	64-Gd-152	74-W -184	92-U -232	96-Cm-250
13-Al-27	27-Co-59	37-Rb-87	46-Pd-104	52-Te-123	57-La-140	64-Gd-153	74-W -186	92-U -233	97-Bk-245
14-Si-28	28-Ni-58	38-Sr-84	46-Pd-105	52-Te-124	58-Ce-136	64-Gd-154	75-Re-185	92-U -234	97-Bk-246
14-Si-29	28-Ni-59	38-Sr-86	46-Pd-106	52-Te-125	58-Ce-138	64-Gd-155	75-Re-187	92-U -235	97-Bk-247
14-Si-30	28-Ni-60	38-Sr-87	46-Pd-107	52-Te-126	58-Ce-139	64-Gd-156	77-Ir-191	92-U -236	97-Bk-248
15-P -31	28-Ni-61	38-Sr-88	46-Pd-108	52-Te-127m	58-Ce-140	64-Gd-157	77-Ir-193	92-U -237	97-Bk-249
16-S -32	28-Ni-62	38-Sr-89	46-Pd-110	52-Te-128	58-Ce-141	64-Gd-158	79-Au-197	92-U -238	97-Bk-250
16-S -33	28-Ni-64	38-Sr-90	47-Ag-107	52-Te-129m	58-Ce-142	64-Gd-160	80-Hg-196	92-U -239	98-Cf-246
16-S -34	29-Cu-63	39-Y -89	47-Ag-109	52-Te-130	58-Ce-143	65-Tb-159	80-Hg-198	92-U -240	98-Cf-248
16-S -36	29-Cu-65	39-Y -90	47-Ag-110m	52-Te-132	58-Ce-144	65-Tb-160	80-Hg-199	92-U -241	98-Cf-249
17-Cl-35	30-Zn-64	39-Y -91	47-Ag-111	53-I -127	59-Pr-141	66-Dy-156	80-Hg-200	93-Np-234	98-Cf-250
17-Cl-37	30-Zn-65	40-Zr-90	48-Cd-106	53-I -129	59-Pr-142	66-Dy-158	80-Hg-201	93-Np-235	98-Cf-251
18-Ar-36	30-Zn-66	40-Zr-91	48-Cd-108	53-I -130	59-Pr-143	66-Dy-160	80-Hg-202	93-Np-236	98-Cf-252
18-Ar-38	30-Zn-67	40-Zr-92	48-Cd-110	53-I -131	60-Nd-142	66-Dy-161	80-Hg-204	93-Np-237	98-Cf-253
18-Ar-40	30-Zn-68	40-Zr-93	48-Cd-111	53-I -135	60-Nd-143	66-Dy-162	81-Tl-203	93-Np-238	98-Cf-254
19-K -39	30-Zn-70	40-Zr-94	48-Cd-112	54-Xe-123	60-Nd-144	66-Dy-163	81-Tl-205	93-Np-239	99-Es-251
19-K -40	31-Ga-69	40-Zr-95	48-Cd-113	54-Xe-124	60-Nd-145	66-Dy-164	82-Pb-204	94-Pu-236	99-Es-252
19-K -41	31-Ga-71	40-Zr-96	48-Cd-114	54-Xe-126	60-Nd-146	67-Ho-165	82-Pb-206	94-Pu-237	99-Es-253
20-Ca-40	32-Ge-70	41-Nb-93	48-Cd-115m	54-Xe-128	60-Nd-147	67-Ho-166m	82-Pb-207	94-Pu-238	99-Es-254
20-Ca-42	32-Ge-72	41-Nb-94	48-Cd-116	54-Xe-129	60-Nd-148	67-Ho-166m	82-Pb-208	94-Pu-239	99-Es-254m
20-Ca-43	32-Ge-73	41-Nb-95	49-In-113	54-Xe-130	60-Nd-150	68-Er-162	83-Bi-209	94-Pu-240	99-Es-255
						68-Er-164	88-Ra-223	94-Pu-241	100-Fm-255

POINT 2018 versus POINT 2015

POINT 2015 is based on ENDF/B-VII.1 and POINT 2018 is based on ENDF/B-VIII evaluations. The difference between them is natural due to changes in the evaluated data but is also due to what we have learned over the last three years and how this experience has been incorporated into the ENDF/B Pre-Processing codes (PREPRO2018) that were used to create POINT2018. Some of the recent changes to PREPRO are summarized below.

PREPRO 2018 Codes

In addition to the changes in the ENDF/B-VIII evaluations, it should be noted that between the last version of this report, where the PREPRO 2015 [9] codes were used, and the current version, where the PREPRO 2018 [10] codes were used, there have been improvements in the ENDF/B Pre-processing codes (PREPRO). The improvements were both in terms of improving the basic methods used by the codes and in terms of incorporating the latest ENDF-6 Formats and Procedures [8] used by the current evaluations. The result is more accurate cross section data throughout the POINT 2018 library.

WARNING – due to recent changes in ENDF-6 Formats and Procedures [8] only the latest version of the ENDF/B Pre-processing codes, namely PREPRO2018 [10], can be used to accurately process all current ENDF/B-VIII evaluations. If you fail to heed this warning and you use any earlier versions of these codes the results can be inaccurate/unpredictable.

The PREPRO 2018 codes run on virtually any computer, and are available FREE on-line from the Nuclear Data Section, IAEA, Vienna, Austria, website at,

<http://www-nds.iaea.or.at/ndspub/endl/prepro/>

Data Processing

As distributed the original evaluated data [7, 8] includes cross sections represented in the form of a combination of resonance parameters and/or tabulated energy dependent cross sections, nominally at 0 Kelvin temperature. For use in applications, this data has been processed using the 2018 version of the ENDF/B Pre-processing codes (PREPRO2018) [10] to produce temperature dependent, linearly interpolable in energy, tabulated cross sections, in the ENDF-6 format.

For use in applications this library has been processed into the form of temperature dependent cross sections at seven neutron reactor like temperatures, between 0 and 1800 Kelvin, in steps of 300 Kelvin (the exception being 293.6 Kelvin, for exact room temperature at 20 Celsius). It has also been processed to five astrophysics like temperatures, 1, 10, 100 eV, 1 and 10 keV. For reference purposes, 300 Kelvin is approximately 1/40 eV, so that 1 eV is approximately 12,000 Kelvin. At each temperature the cross sections are tabulated and linearly interpolable in energy.

The steps required, and codes used to produce room temperature, linearly interpolable tabulated cross sections, in the ENDF-6 format [8], are described below; the name of each code is given in parenthesis; for details of each code see reference [9, 10].

Here are the steps, and PREPRO 2018 codes, used to process the data, in the order in which the codes were used.

- 1) Convert all data to a FORTRAN, C and C++ compatible format (**ENDF2C**)
- 2) Convert to Linearly interpolable, tabulated energy dependent cross sections (**LINEAR**)
- 3) Add the resonance contribution to cross sections (**RECENT**)
- 4) Doppler broaden all cross sections to each temperature (**SIGMA1**)
- 5) Check data, define redundant cross sections by summation (**FIXUP**)
- 6) Update evaluation dictionary in MF/MT=1/451 (**DICTIN**)

For the "cold" (0 Kelvin) data steps 1), 2), 3) and 5), 6) were used (no Doppler broadening). For the data at other temperatures, after steps 1), 2), 3), the data were Doppler broadened to each temperature using step 4), and the results were then made consistent with the ENDF/B formats and conventions [8] using steps 5) and 6), to produce the final distributed data.

The result is linearly interpolable in energy, tabulated, temperature dependent cross sections, in the simple text ENDF-6 format, ready to be used in applications.

Note - this processing only involved the energy dependent neutron cross sections. All other data in the evaluations, e.g., angular and energy distributions, was not affected by this processing, and is identical in all versions of the results, i.e., it is the same in all the directories, ENDF2C, as well as K0 through K1800, and 1ev through 10kev.

Accuracy or Uncertainty of Results

WARNING: PLEASE do not confuse the OVERALL UNCERTAINTY of the ENDF/B data with the additional uncertainty introduced by the PREPRO codes. I judge that the ENDF/B cross sections for any isotope, at any temperature and incident neutron energy is not known to better than roughly 1%; we may know integrals more accurately, but not the detailed energy dependent cross sections. As such I have defined the **additional uncertainty** added by the PREPRO codes to be so small that they add essentially no additional uncertainty to the OVERALL uncertainty in the ENDF/B data.

Each of the codes described above that was used to process data to obtain tabulated, linearly interpolable in energy cross sections, processed the data to within a user defined accuracy, or allowable uncertainty. The ENDF/B Pre-processing codes (PREPRO) are self-documenting, in the sense that the ENDF/B formatted output data that each code produces includes comments at the beginning of each evaluation defining the accuracy to which the cross sections were calculated. The combination of comments added by all of the codes defines the sequence and accuracy used by all of them. The accuracy is the same for all evaluations. Therefore, for exact details of the accuracy of the data, see the comments at the beginning of any evaluation. For use in POINT2018 all cross sections were reconstructed to within an accuracy of 0.01% in the thermal range, and 0.1 % at all other incident neutron energies and temperatures; this is beyond the accuracy to which this data is known, so I assume **that the PREPRO data processing used to produce POINT2018 does not add any significant additional uncertainty to the inherent overall uncertainty of the data.** For data testing purposes this is important for users to understand.

Contents of the Library

This library **contains** all the evaluations in the ENDF/B-VIII general purpose library. The above tables summarize the contents of the ENDF/B-VIII general purpose library. This library contains evaluations for 557 materials; all are isotopes of elements Z=1 through 100, but be aware that data is not necessarily included for all elements, Z = 1 through 100; see the above table for a summary.

This POINT2018 library **does not contain** data from special purpose ENDF/B-VIII libraries, such as fission products, thermal scattering, photon interaction data. To obtain any of these special purpose libraries contact the National Nuclear Data Center, Brookhaven National Laboratory, ENDF@bnlnd2.dne.bnl.gov

The POINT 2018 library include each of the 557 evaluations is stored as a separate file. The data are in the simple text ENDF-6 format, which allows the data to be easily transported between computers. The entire library requires approximately 9 gigabytes of storage in compressed form; once uncompressed the data for each temperature requires roughly 2 to 3 gigabytes.

This library contains data for some metastable materials, which are indicated by an "M" at the end of their name, e.g., ZA052131.M = 52-Te-131m

Most of these evaluations are complete, in the sense that they include all cross sections over the energy range 10^{-5} eV to at least 20 MeV.

The POINT2018 webpage is compressed; when uncompressed you will find a single directory named POINT2018 containing fourteen (14) sub-directories,

DOCUMENT - A copy of this report in MSWord and PDF formats.

ENDF2C - The original ENDF/B data After being processed by ENDF2C.

0K - 0 Kelvin cross sections

293.6K - 293.6 Kelvin cross sections

600K - 600 Kelvin cross sections

900K - 900 Kelvin cross sections

1200K - 1200 Kelvin cross sections

1500K - 1500 Kelvin cross sections

1800K - 1800 Kelvin cross sections

1eV - 1 eV cross sections

10eV - 10 eV cross sections

100eV - 100 eV cross sections

1keV - 1 keV cross sections

10keV - 10 keV cross sections

Except for DOCUMENT, each of these directories contains 557 files, one file for each of the 557 evaluations. Each evaluation is a simple text file, 80 characters per line, and is a complete ENDF/B "tape" [8], including a starting "tape" identification line, and ending with a "tape" end line [8]. In this simple text form, each file can be used by a wide variety of available computer codes that treat data in the ENDF/B format, e.g., all the PREPRO codes.

Requesting POINT2018 Data

Please do not contact the author of this report to request this data; I do not have the resources necessary to directly respond to requests for this data. This data has been distributed and is Internationally available from nuclear data/code centers throughout the World,

- 1) Within the United States: contact the National Nuclear Data Center, Brookhaven National Laboratory, Mike Herman at, services@bnlnd2.dne.bnl.gov
- 2) Within Western Europe: contact the OECD Nuclear Energy Agency/ Data Bank (NEA/DB), Paris, France, programs@nea.fr
- 3) Otherwise: contact the Nuclear Data Section, International Atomic Energy Agency, Vienna, Austria at nds.contact-point@iaea.org.

Installation and Use of POINT2018

I recommend that you,

- 1) Copy the single compressed POINT2018 file to your computer,
- 2) Uncompress and un-tar the file; then delete the compressed and tar files.
- 3) You should then have one directory named POINT2018 containing all the data
- 4) To randomly access the data, execute (double click) POINT2018.htm.

The main POINT2018 directory will contain the fourteen (14) sub-directories, described above. These POINT2018 directories include HTML routines to allow interactive retrieval of the data. Once uncompressed the result will be a directory of about 15 gigabytes. To put that in perspective, today it costs less than \$0.10 U.S. to purchase, install, and maintain on-line one gigabyte of disk storage. Therefore, the cost of maintaining this 15 gigabyte library on-line is trivial.

FORTRAN, C C++ Compatible ENDF results

I have added the **ENDF2C** code to PREPRO, to ensure that ALL PREPRO output in the simple text ENDF format are completely FORTRAN, C and C++ compatible. Currently evaluated data even from major code centers are still not completely FORTRAN, C and C++ compatible. Therefore, when I begin pre-processing any evaluation the first PREPRO code I run is **ENDF2C** to ensure that ALL ENDF formatted output in subsequent codes are completely compatible. This is a very important step: it would be such a shame if after all the effort invested to produce accurate results it cannot be accurately read and used by application codes. If as recommended you ALWAYS use **ENDF2C** first, you will be able to avoid this problem. PREPRO also uses the current ENDF convention that sequence numbers start at 1 for each section (MAT/MF/MT), instead of the older convention starting at 1 for each material (MAT).

Before ENDF2C

1.002000+3	1.996800+0	0	0	0	0	128	3	1	125
0.000000+0	0.000000+0	0	0	1	149	128	3	1	126
	149	2				128	3	1	127
1.000000-5	3.420300+0	1.000000-4	3.403000+0	2.530000-2	3.395510+0	128	3	1	128
1.000000+2	3.395010+0	1.000000+3	3.394900+0	2.000000+3	3.394800+0	128	3	1	129
3.000000+3	3.394400+0	4.000000+3	3.389400+0	5.000000+3	3.385000+0	128	3	1	130
1.000000+4	3.367000+0	2.000000+4	3.342000+0	3.000000+4	3.321000+0	128	3	1	131
4.000000+4	3.302000+0	5.000002+4	3.285000+0	6.000002+4	3.270000+0	128	3	1	132

After ENDF2C

1002.00000	1.99680000	0	0	0	0	128	3	1	1
0.0	0.0	0	0	1	149	128	3	1	2
	149	2				128	3	1	3
1.000000E-5	3.42030000	1.000000E-4	3.40300000	.025300000	3.39551000	128	3	1	4
100.000000	3.39501000	1000.00000	3.39490000	2000.00000	3.39480000	128	3	1	5
3000.00000	3.39440000	4000.00000	3.38940000	5000.00000	3.38500000	128	3	1	6
10000.0000	3.36700000	20000.0000	3.34200000	30000.0000	3.32100000	128	3	1	7
40000.0000	3.30200000	50000.0200	3.28500000	60000.0200	3.27000000	128	3	1	8

Note that in the above example we can see that the numerical values are EXACTLY the same in both cases. However, the ENDF2C output include 9 digits of precision, and is completely FORTRAN, C and C++ compatible. In comparison the ENDF 7-digit, so called “E-less” data, such as 1.234567+3 (as opposed to 1234.56789) is not standard in any computer language and can lead to errors in interpretation when codes attempt to read this data.

Here we see that the 7-digit output is unable to accurately define the shape of these resonances – this is IMPORTANT to understand, so let me repeat: it is PHYSICALLY IMPOSSIBLE with only 7 digits. Rather than the smooth profile produced by the RECENT 9-digit output, the 7-digit STANEF output produces Ziggurats = stepped pyramids. To understand the problem we need merely compare the 9-digit RECENT output near the peak of the resonance,


122600.007	8.18440080	122600.018	8.34734256	122600.021	8.391426722631	3	1	6030
122600.028	8.49343634	122600.055	8.86885730	122600.077	9.139853322631	3	1	6031
122600.099	9.36221564	122600.120	9.51387393	122600.131	9.565109362631	3	1	6032
122600.142	9.59483076	122600.153	9.60178112	122600.164	9.585085692631	3	1	6033
122600.176	9.53939892	122600.178	9.52899291	122600.180	9.517793222631	3	1	6034
122600.182	9.50580250	122600.184	9.49302393	122600.196	9.400050502631	3	1	6035
122600.207	9.29106975	122600.218	9.16076388	122600.229	9.010880802631	3	1	6036
122600.240	8.84348060	122600.251	8.66085453	122600.261	8.483667022631	3	1	6037
122600.283	8.06587838	122600.305	7.62540465	122600.319	7.341331292631	3	1	6038
122600.332	7.07896654	122600.354	6.64519685	122600.375	6.250366772631	3	1	6039
122600.397	5.86278292	122600.419	5.50514627	122600.441	5.178659552631	3	1	6040
122600.462	4.89577103	122600.484	4.62825344	122600.505	4.398676332631	3	1	6041
122600.527	4.18301692	122600.549	3.99047205	122600.571	3.818722112631	3	1	6042
122600.592	3.67214930	122600.614	3.53482178	122600.625	3.471802962631	3	1	6043
122600.636	3.41225491	122600.658	3.30276311	122600.679	3.209061382631	3	1	6044
122600.701	3.12093801	122600.722	3.04533219	122600.744	2.974035832631	3	1	6045
122600.766	2.90992540	122600.788	2.85219006	122600.809	2.802371112631	3	1	6046
122600.831	2.75512041	122600.853	2.71238188	122600.875	2.673669622631	3	1	6047
122600.896	2.64007944	122600.918	2.60804847	122600.939	2.580185982631	3	1	6048
122600.961	2.55355301	122600.983	2.52927697	122601.005	2.507124522631	3	1	6049

To the STANEF 7-digit output over the same energy range,

1.226000+5	8.184401+0	1.226000+5	8.347343+0	1.226000+5	8.391427+02631	3	1	4518
1.226000+5	8.493436+0	1.226001+5	8.868857+0	1.226001+5	9.139853+02631	3	1	4519
1.226001+5	9.362216+0	1.226001+5	9.513874+0	1.226001+5	9.565109+02631	3	1	4520
1.226001+5	9.594831+0	1.226002+5	9.601781+0	1.226002+5	9.585086+02631	3	1	4521
1.226002+5	9.539399+0	1.226002+5	9.528993+0	1.226002+5	9.517793+02631	3	1	4522
1.226002+5	9.505802+0	1.226002+5	9.493024+0	1.226002+5	9.400051+02631	3	1	4523
1.226002+5	9.291070+0	1.226002+5	9.160764+0	1.226002+5	9.010881+02631	3	1	4524
1.226003+5	8.843481+0	1.226003+5	8.660855+0	1.226003+5	8.483667+02631	3	1	4525
1.226003+5	8.065878+0	1.226003+5	7.625405+0	1.226003+5	7.341331+02631	3	1	4526
1.226003+5	7.078967+0	1.226004+5	6.645197+0	1.226004+5	6.250367+02631	3	1	4527
1.226004+5	5.862783+0	1.226004+5	5.505146+0	1.226004+5	5.178660+02631	3	1	4528
1.226005+5	4.895771+0	1.226005+5	4.628253+0	1.226005+5	4.398676+02631	3	1	4529
1.226005+5	4.183017+0	1.226005+5	3.990472+0	1.226006+5	3.818722+02631	3	1	4530
1.226006+5	3.672149+0	1.226006+5	3.534822+0	1.226006+5	3.471803+02631	3	1	4531
1.226006+5	3.412255+0	1.226007+5	3.302763+0	1.226007+5	3.209061+02631	3	1	4532
1.226007+5	3.120938+0	1.226007+5	3.045332+0	1.226007+5	2.974036+02631	3	1	4533
1.226008+5	2.909925+0	1.226008+5	2.852190+0	1.226008+5	2.802371+02631	3	1	4534
1.226008+5	2.755120+0	1.226009+5	2.712382+0	1.226009+5	2.673670+02631	3	1	4535
1.226009+5	2.640079+0	1.226009+5	2.608048+0	1.226009+5	2.580186+02631	3	1	4536
1.226010+5	2.553553+0	1.226010+5	2.529277+0	1.226010+5	2.507125+02631	3	1	4537


Here the entire shape of the resonance is between 122.599 keV and 122.601 keV, and we can see that all the above tabulated points in both tables start with EXACTLY the same six digit energy 122600. This means that with 9-digit RECENT output we only have three digits with which to define the entire shape of the resonance, which is adequate, but with 7-digit STANEF output we only have one digit!!!!, which is far from adequate. Compare what should be EXACTLY the same energy points that I have highlighted, and you will see smooth variation of the 9-digit RECENT energies, but **ALL OF THE HIGHLIGHTED 7-DIGIT STANEF ENERGIES ARE EXACTLY THE SAME VALUE, 1226600.2 eV**, which is what is causing the Ziggurats (stepped pyramids) that we see in the above figures = a constant X value (energy) and a range of Y values (cross sections), creating a vertical STEP in the above figure = nonsense, completely due to nothing but truncating to 7-digit energies.

The bottom line here is to understand that due to the details included in modern evaluations it is **physically impossible for 7-digit output to accurately represent the energy dependent cross sections to anywhere near our target allowable uncertainty (0.1%)**. In this case we find differences in the total of over 14% and in capture over 21%; see the above plots = **140 to 210 times our target uncertainty of 0.1%**. Be aware that these are not isolated differences in a few resonances; we see these differences over the entire resolved resonance energy range, and this isn't even the worse case, e.g., the latest Fe56 evaluation includes resonances well up into the MeV range, an order of magnitude higher in energy than the resonances shown in the above figures. Below is but one example of a capture resonance in the MeV range **where truncating from 9-digits to 7-digits results in differences of up to 226% = over a factor of 2!!!!**

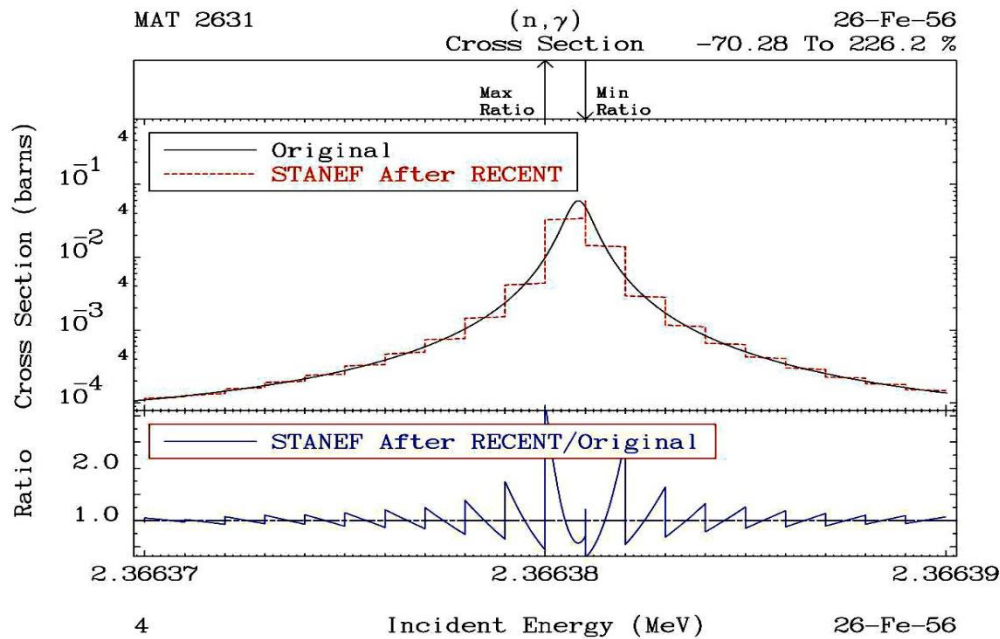

Improved BEST Input Parameters


Based on extensive use of the earlier versions of the PREPRO codes over many years we have been able to define the **BEST Input Parameters** to use with these codes. Of particular note is that simply decreasing the minimum cross section from 10^{-10} to 10^{-30} barns to be linearized (tabulated data below the minimum are copied, ignoring the ENDF interpolation code). This has a rather dramatic effect, particularly on (neutron, charged particle) reactions, which often have long, slowly decreasing tails toward the reaction threshold. In the below example the evaluator tabulated values of the cross sections down to below 10^{-20} barns using log-log interpolation (INT=5). Earlier versions of PREPRO ignored the interpolation code below 10^{-10} and copied the original tabulated values and indicated lin-lin interpolation (INT=2). In contrast today using the **BEST input** PREPRO linearized the cross sections over the entire tabulated range. Here the cross section can be quite small, but extend over a large energy range, so there might be an integral effect; **in the below plot interpolated values differ by up to a factor of 1 million**. Since this extension has only a minor effect on the overall size of the pre-processed ENDF data (i.e., the number of tabulated energy points), there is virtually no penalty in accurately including these data.

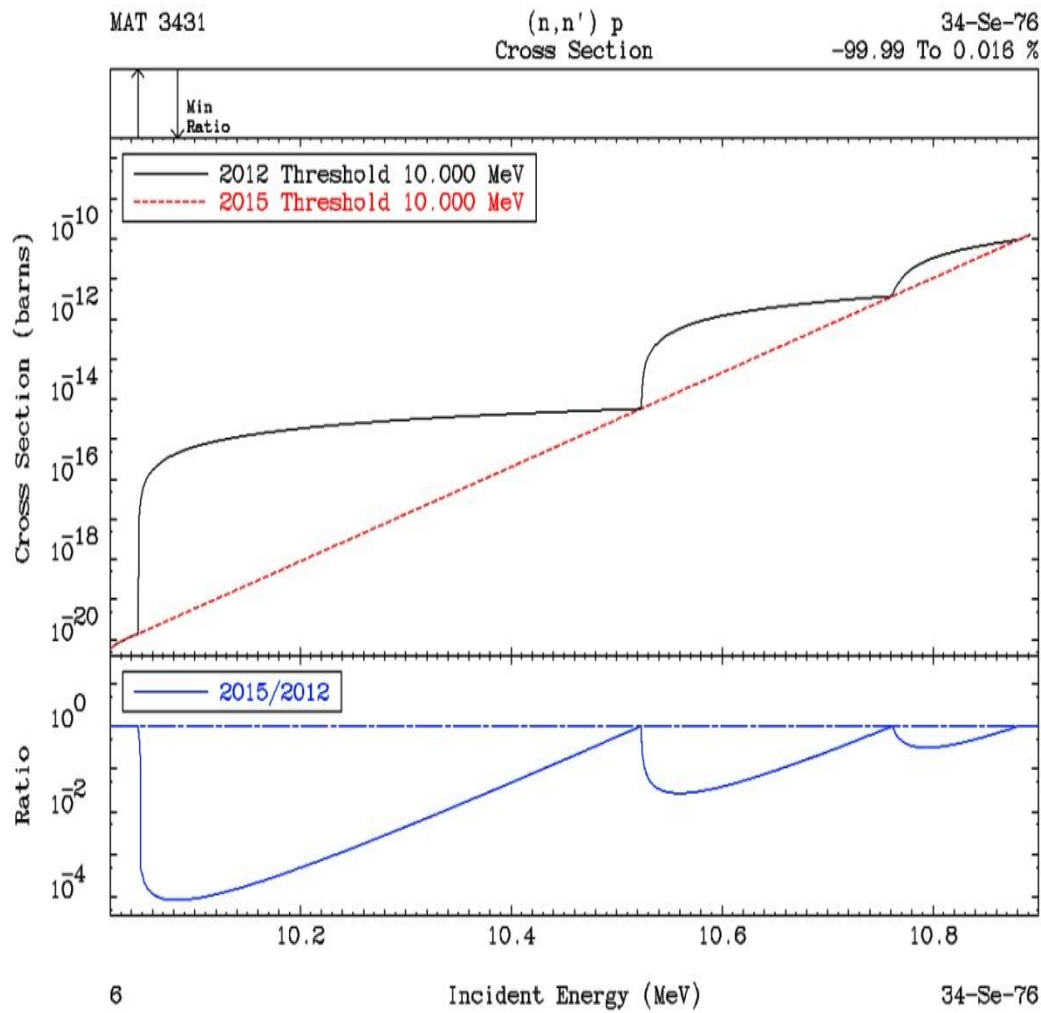

Doppler Broadening High Energy Cutoff

Today many modern evaluations extend to very high incident neutron energies, well above the traditional ENDF 20 MeV upper energy limit for evaluations. In these cases, the theoretical models used for the evaluations often change at or near 20 MeV, which can cause an abrupt change (a non-physical discontinuity) in cross sections. To compensate for the “intent” of the evaluators, PREPRO Doppler broadening now only extends up to 10 MeV. This has the effect of **making the “discontinuities” in the cross section at or near 20 MeV, temperature independent**, which I judge to be the “intent” of the evaluators, i.e., this reproduces the result of the models used.

Here we are admittedly choosing between “the Devil and the deep blue sea” = both results shown in the below figures are PHYSICALLY incorrect. The discontinuities that we see in newer evaluations to extend them above 20 MeV, are NONSENSE, e.g., no evaluator would claim these discontinuities are real. But ‘smoothing’ this discontinuity due to Doppler broadening only makes the results worse and more difficult to interpret/see. As a result, I have chosen to not Doppler broaden, and keep the cross sections, including any discontinuity exactly as defined by the evaluator. This approach will at least allow us to “see” whether this discontinuity is of any importance in our calculations; and if it is, we are able to request that evaluators deal with any discontinuities.

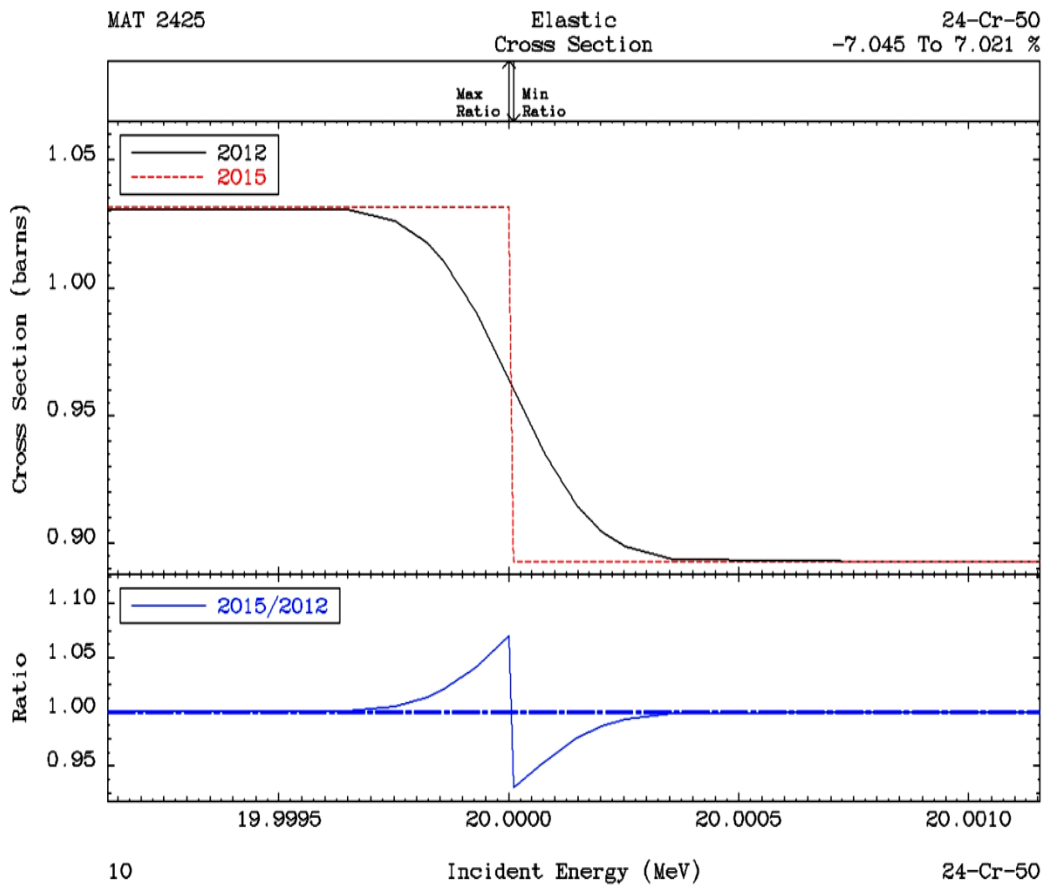

The Effects of Temperature and Doppler Broadening

For those readers who are not familiar with the effects of temperature and Doppler broadening on neutron cross sections and transport, for details I suggest that you read references [11], [12] and [13]. Here I will give a brief description of these effects. Users of neutron cross sections should be aware that there are several important effects of temperature and Doppler broadening,

First an important point to understand is that: **neutron cross sections ARE NOT TEMPERATURE DEPENDENT**, that I to say in the relative frame-of-reference at the same relative speed the cross sections are temperature INDEPENDENT. Unfortunately, normally we do not perform our calculations in the relative frame-of-reference; we perform our calculations in the Laboratory frame-of-reference, and it is our transformation to the LAB frame that make neutron cross sections “appear” to be temperature dependent. This problem of relative motion is quite similar to the “apparent” rotation of the Sun about the Earth, that led to mankind assuming the Earth was the center of the Universe for thousands of years. In the LAB frame-of-reference we have a similar problem in that the thermal motion of atoms within any material can change the RELATIVE speed between a neutron and a target atom, and this effect will depend on how fast the atoms within the material are moving, and this SPEED of the atoms is directly related to the TEMPERATURE of the medium. If you read references such as [11] and [12], you will see that they are using exactly the same basic cross sections at all temperatures (the temperature independent, relative frame data), but in order to define the LAB frame-of-reference cross sections we need, they average over the thermal motion of the atoms in the material in order to define the average cross section “seen” (encountered) by a neutron with any given LAB speed.

As far as the effect of temperatures, first I will mention the well known effect in the neutron resonance region, where as the temperature increases resonances become broader, hence the name Doppler broadening. Figure 1 below illustrates the effect of temperature on the U^{238} capture cross section for neutron reactor like temperatures, and figure 2 illustrates this effect for astrophysical like temperatures. These figures each contain four sub-figures, with each sub-figure comparing cross sections at two progressively higher temperatures. In both figure 1 and 2 each sub-figure shows exactly the same incident neutron LAB energy and cross section range. From these figures we can see that as temperature increases the peaks of the resonances become lower, and the minima between resonances become higher. At extremely high temperature the entire resonance structure disappears, and the cross section approaches a simple $1/v$ shape (where v is the neutron speed) (see, ref. 11 for an explanation). This temperature effect will have a very important effect on resonance self-shielding in any neutron transport calculation. You should note from these figures that due to the large resonance spacing in U^{238} the resonance structure can still be seen up to very high temperatures.

To understand the importance of considering temperature we should consider reaction rates, such as captures/second, in various systems. In optically thin systems (few mean free paths dimensions) the flux will be unshielded, and our reaction rates will be defined by a simple cross section average,

$$\text{Unshielded Capture} = \int_{E_1}^{E_2} [\Sigma c(E)\phi(E)]dE = \text{capture cross section times neutron flux}$$

In optically thick systems (many mean free paths dimensions) the flux will be shielded (the flux is suppressed by the total cross section) and our reaction rates must include the effect of self-shielding on the cross section average,

$$\text{Shielded Capture} = \int_{E1}^{E2} [\Sigma_c(E)\phi(E)/\Sigma_t(E)]dE = \text{including one over total cross section}$$

Consider for example the U238 capture cross section in the incident neutron energy between 1 and 10 keV as shown in fig. 1 and 2. If we calculate the unshielded and shielded average capture cross section for the energy interval over the range of temperatures shown in figs. 1 and 2, we obtain the results shown below in the below table.

What we see from these results is that the unshielded average capture cross section is virtually independent of temperature, being about 1 barn over the entire temperature range. In contrast the shielded average cross section varying by over a factor of three between the 0 K average (0.293 barns) and the 10 keV average (0.939 barns). **The point to learn from this is that without including the effect of self-shielding in multi-group calculations, temperature has very little effect on the average cross sections, which is quite simply wrong for optically thick systems.**

Effect of Temperature on Average Cross Sections

Temp.	Unshielded (barns)	Shielded (barns)
0 K	0.996	0.293
293.6 K	0.966	0.526
600 K	0.996	0.576
1,200 K	0.996	0.630
12,000 K (1 eV)	0.996	0.799
10 eV	0.998	0.905
100 eV	1.000	0.933
1 keV	1.004	0.935
10 keV	1.007	0.939

Another, less well known, effect of Doppler broadening is at lower energies where as temperature increases the low energy constant scattering cross section increases and at very low energies approaches a simple 1/v shape (where v is the neutron speed); this effect is explained in detail in ref [11]. Figure 3 illustrates the effect of temperature on the hydrogen total cross section. From this figure we can see that starting from a “cold” (0 Kelvin) cross section that is constant at about 20 barns, as temperature increases the cross section increases. Compared to the “cold” 20 barn cross section, at thermal energy the Doppler broadened cross section is about 30 barns, i.e., 50 % higher. Note also from this figure that this effect extends well above thermal energy. For example, at 293.6 Kelvin the thermal energy is 0.0253 eV, but we can see this effect up to about 1 eV; a factor of 400 higher in energy. From the lower half of figure 2 we can see that at very low energy the cross section approaches a simple 1/v shape (where v is the neutron speed) and the cross sections at various temperatures become proportional to one another. This effect on the cross sections at low energy is very important for thermal and low energy neutron systems.

Yet another important effect of temperature is that at lower energies neutrons do not slow down in energy as quickly and neutron scatter can even result in the upscatter of neutrons, i.e., when neutrons scatter they can gain, rather than lose, energy. This is a well known effect at low energies, where thermal scattering law data or a free gas model is used to model the interaction of neutrons with target atoms that are moving about with thermal motion [12]. Figure 4 illustrates the effect of temperature on the neutron spectrum over a wide range of temperatures [12]. This effect can also be important at higher energies, particularly near narrow resonances, where thermal motion of the target atoms can cause neutrons to slightly upscatter, but even slight upscatter can cause a neutron to scatter from below to above the energy of a very narrow resonance. See reference [12], for a routine designed to be used in conjunction with the SIGMA1 method of Doppler broadening [11], to handle neutron thermal scattering. This routine [12] is completely compatible for use with the cross sections included here, since these cross sections were Doppler broadened using the SIGMA1 method [11]. The combination of SIGMA1 [11] Doppler broadened cross sections and THERMAL [12] to handle thermal scattering, is currently used in the TART Monte Carlo transport code [13].

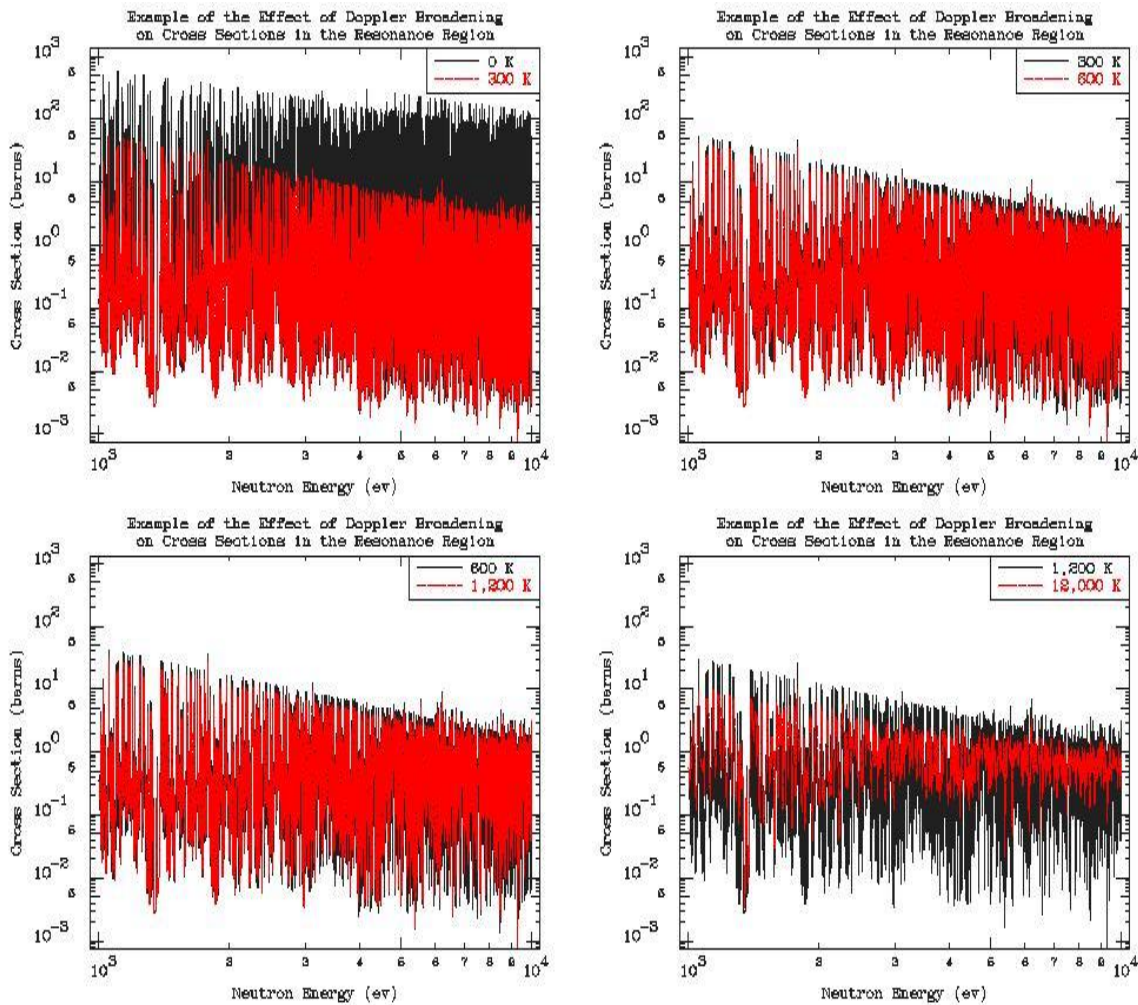


FIG.1. Effect of Doppler Broadening on Resonance Cross Sections.

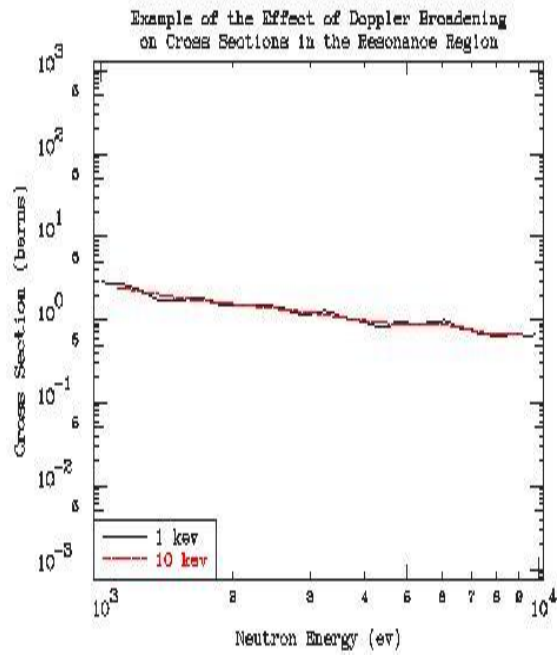
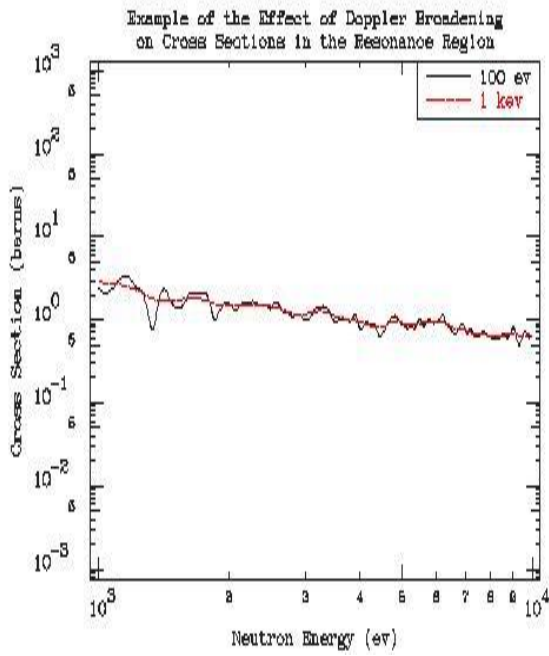
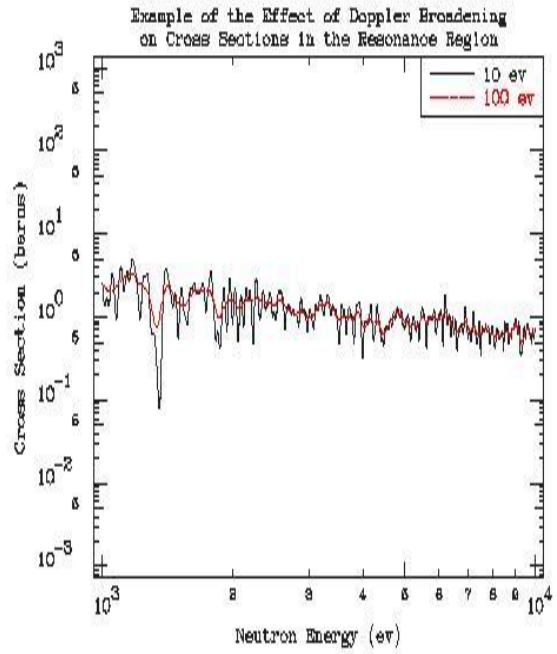
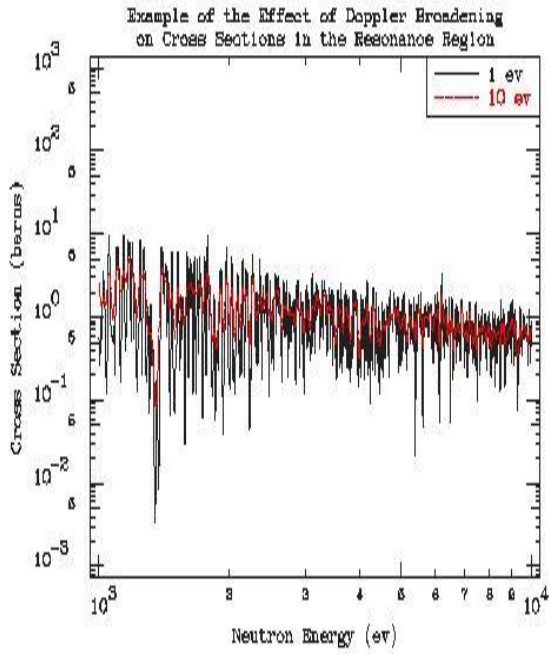


FIG. 2. Effect of Doppler Broadening on Resonance Cross Sections.

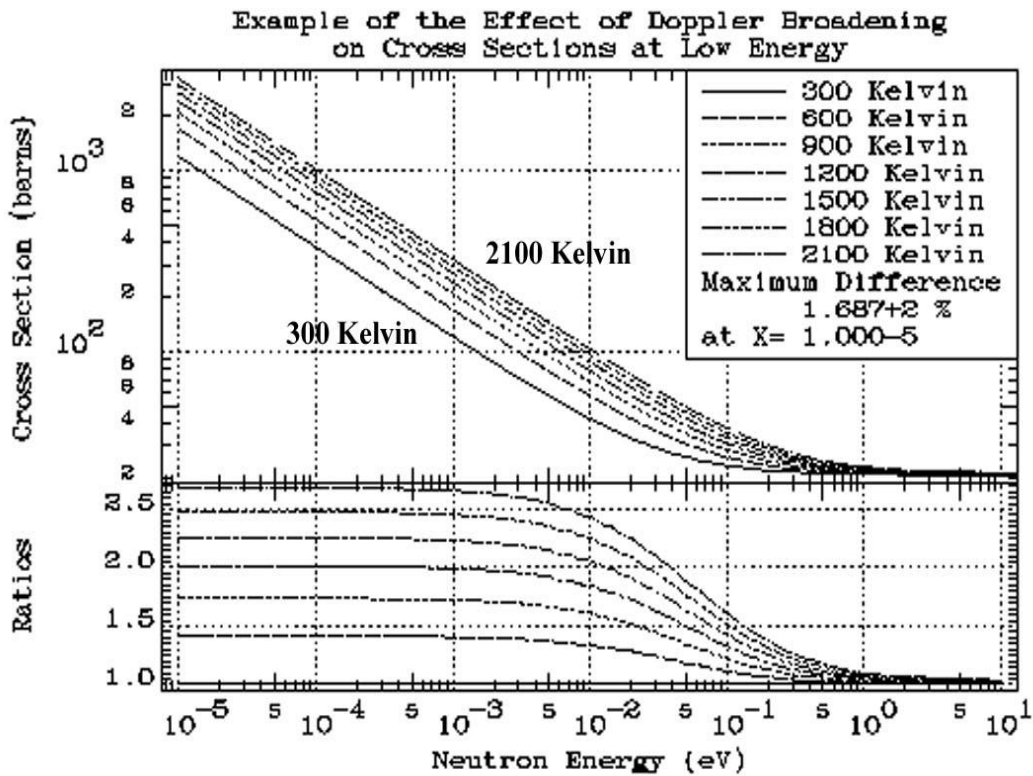
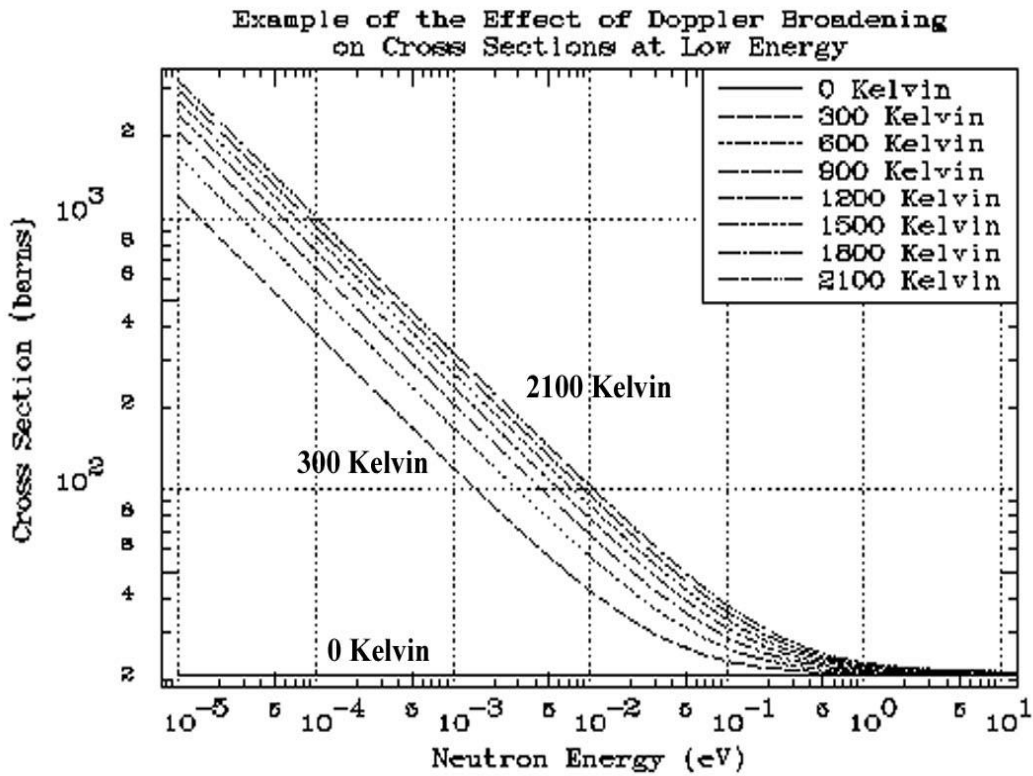


FIG.3. Effect of Doppler Broadening on Low Energy Cross Sections.

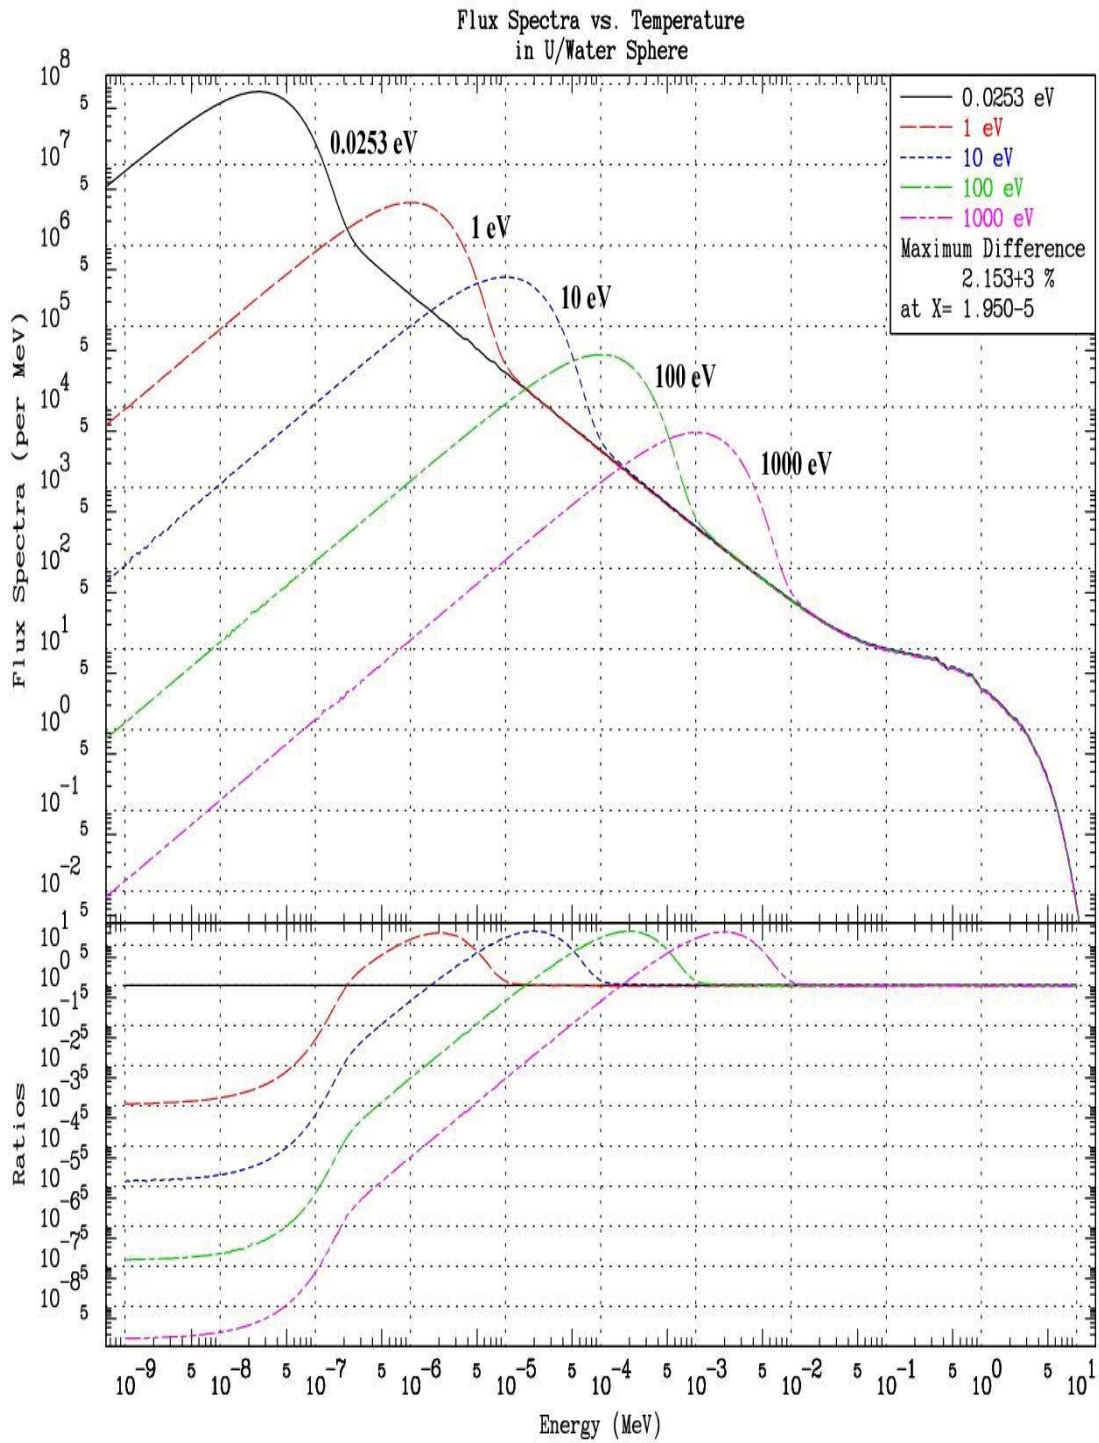


FIG.4. Effect of Doppler Broadening on Neutron Spectrum.

References

- [1] **POINT 2003**: A Temperature Dependent ENDF/B-VI, Release 8, Cross Section Library, Lawrence Livermore National Laboratory, CA (US), UCRL-ID-127776-Rev-2, May 2003.
- [2] **POINT 2004**: A Temperature Dependent ENDF/B-VI, Release 8, Cross Section Library, Lawrence Livermore National Laboratory, UCRL-TR-202284, April 2004.
- [3] **POINT 2007**: A Temperature Dependent ENDF/B-VII.0 Data Cross Section Library, Lawrence Livermore National Laboratory, UCRL-TR-228089, February 2007.
- [4] **POINT 2009**: Temperature Dependent ENDF/B-VII.0 data Cross Section Library, June, 2009 (unpublished report); see my website for a copy;
<http://redcullen1.net/HOMEPAGE.NEW/Papers/POINT2009/POINT2009.pdf>
- [5] **POINT 2011**: A Temperature Dependent.net/homepage.new ENDF/B-VII.0 data Cross Section Library, Lawrence Livermore National Laboratory, UCRL-TR-479947, rev. 1, May 2011.
- [6] **POINT 2015**: ENDF/B-VII.1 Final Temperature Dependent Cross Section Library, IAEA-NDS-221, IAEA, Vienna, Austria, March 2015.
- [7] **ENDF/B-VIII.0**: The 8th Major Release of the Nuclear Reaction Data Library with CIELO-project Cross Sections, New Standards and Thermal Scattering Data, D.A.Brown, et.al. Nucl. Data Sheets **148** (2018) 1-142.
- [8] **ENDF-102**: ENDF-6 Formats Manual: Data Formats and Procedures for the Evaluated Nuclear Data Files ENDF/B-VI, ENDF/B-VII and ENDF/B-VIII, BNL-203218-2018-INRE, Rev. 215, Feb. 2018, edited by A. Trkov, M. Herman and D. A. Brown, National Nuclear Data Center, Brookhaven National Lab. <http://www.nndc.bnl.gov/csewg/docs/endl-manual.pdf>
- [9] **PREPRO2017**: 2017 ENDF/B Pre-processing Codes, IAEA-NDS-39, Rev. 17, May 2017, <https://www-nds.iaea.org/publications/iaea-nds/iaea-nds-0039-rev17.pdf>
- [10] **PREPRO2018**: 2018 ENDF/B Pre-processing Codes, in Press to be released later in 2018.
- [11] Exact Doppler Broadening of Tabulated Cross Sections, by D.E. Cullen and C.R. Weisbin, Nucl. Sci. Eng. **60** (1976) 199.
- [12] **THERMAL**: A Routine Designed to Calculate Neutron Thermal Scattering, by D.E. Cullen, Lawrence Livermore National Laboratory, UCRL-ID-120560-Rev-1, Sept. 1995.
- [13] **TART 2016**: An Overview of a Coupled Neutron-Photon 3-D, Combinatorial Geometry Time Dependent Monte Carlo Transport Code, Report: LLNL-SM-704560, Code Release: LLNL-CODE-708759, September 2016. <https://e-reports-ext.llnl.gov/pdf/837508.pdf>